

2.3 - 2.7 GHz Dual Polarized Antenna

PA2-1720-DP




2.7 GHz, 20 dBi, 17° Panel Antenna

- Dual Pole, Vertical and Horizontal
- Dual slant if mounted diagonally
- Exceptionally efficient performance
- High gain/size ratio
- Aesthetic design
- Weatherized and durable
- Mount allows for 45deg. turn installation

Technical Specifications

ELECTRICAL		MECHANICAL	
FREQUENCY RANGE	2.3 - 2.7 GHz	DIMENSIONS (HXWXD)	370 x 370 x 40 mm (14.5" x14.5" x 1.6")
GAIN,TYP.	19 dBi \hat{A} ± 1 dBi	WEIGHT	1.8 kg
VSWR, MAX.	1.7:1	CONNECTOR	2 x N-Type Female
3 DB BEAM-WIDTH, H-PLANE, TYP.	17°	BACK PLANE	Aluminum; protected through chemical passivation
3 DB BEAM-WIDTH, E-PLANE, TYP.	17°	RADOME	UV Protected, Polycarbonate
SIDE LOBES, MIN.	-12 dB	MOUNT	MNT-22
POLARIZATION	Dual Pole, Vertical and Horizontal	ENVIRONMENTAL	
CROSS POLARIZATION, MIN.	-19 dB	OPERATING TEMPERATURE RANGE	- 40°C to + 65°C
PORT TO PORT ISOLATION	- 25 dB	VIBRATION	According to IEC 60721-3-4
FRONT TO BACK RATIO, MIN.	-30 dB	WIND LOAD	200 km/h (Survival)
INPUT POWER, MAX	10 Watt	FLAMMABILITY	UL94
INPUT IMPEDANCE	50 Ohm	WATER PROOFING	IP-67
LIGHTNING PROTECTION	DC Grounded	HUMIDITY	ETS 300 019-1-4,EN 302 085 (Annex A.1.1)
ORDERING OPTIONS		SALT FOG	According to IEC 68-2-11
ANTENNA SUITED FOR MNT-22 (Optional wall/pole adjustable mount)	PA2-1720-DP		

Antenna Patterns

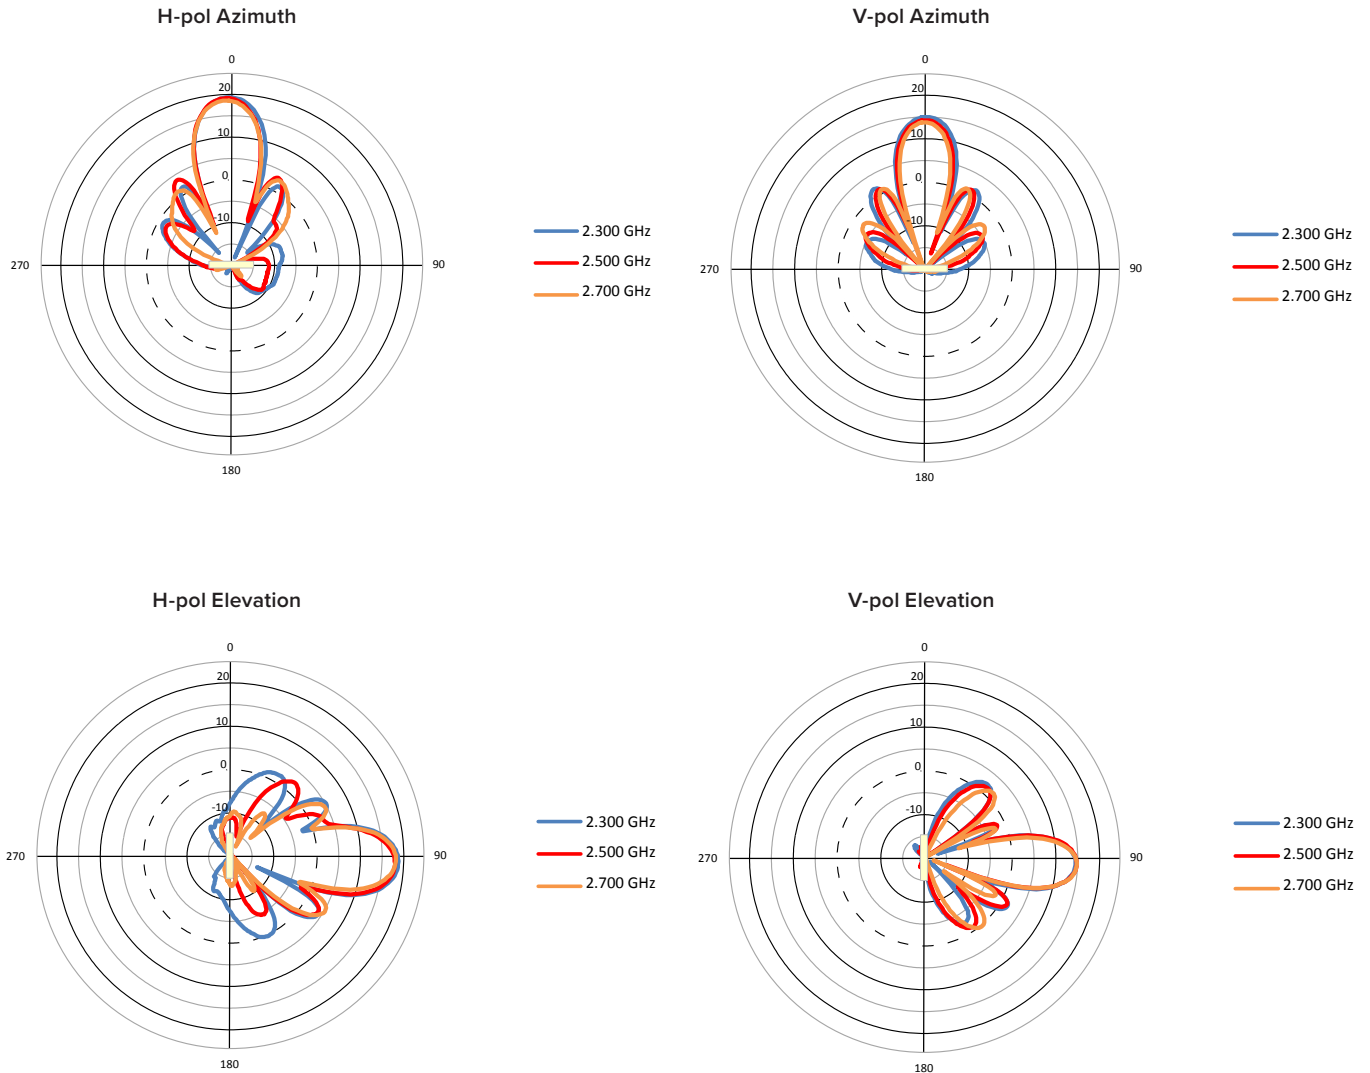

ABOUT PROXIM WIRELESS:

Proxim Wireless is a global leader in advanced wireless broadband and WiFi solutions that deliver high performance and high availability communications. Celebrating 40 years of pioneering wireless solutions, Proxim is recognized for unparalleled reliability, superior performance, and drive for innovation.

© 2023 Proxim Wireless Corporation. All rights reserved. Proxim is a registered trademark and the Proxim logo is a trademark of Proxim Wireless Corporation. All other trademarks mentioned herein are property of their respective owners. Specifications are subject to change without notice.